


Personal Protective Equipment

Product Catalog 2022

SAFETY IS OUR PRIORITY



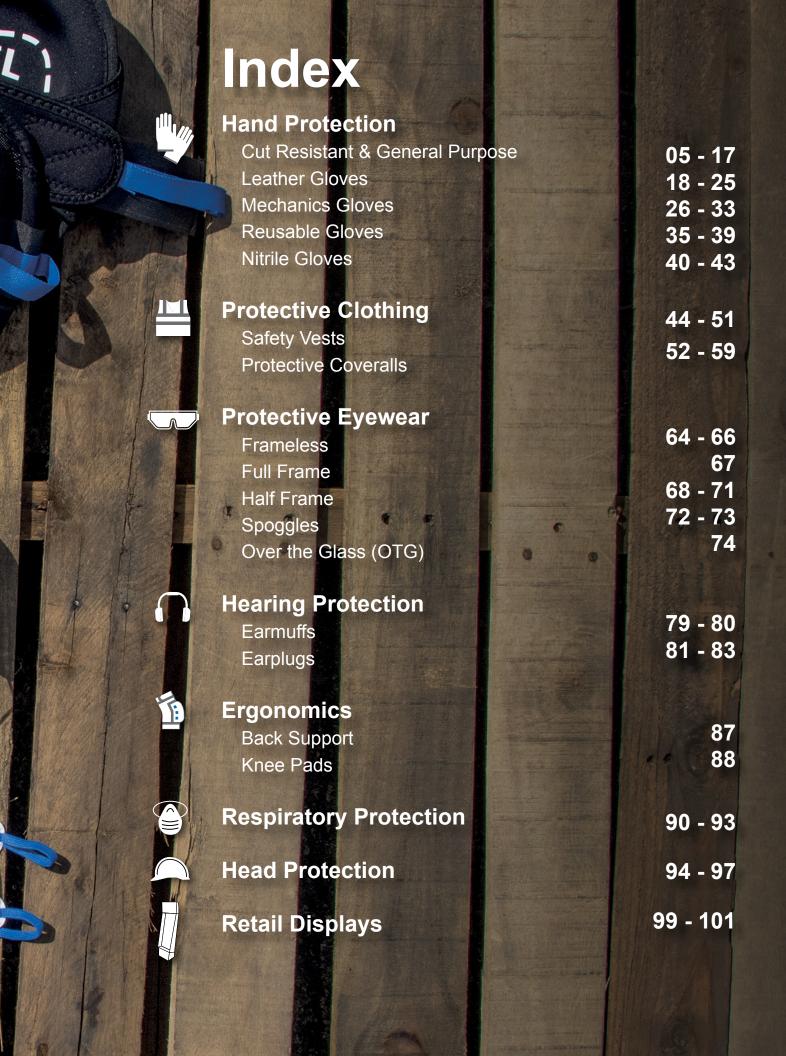






Hand Protection Standards

EN 388 Regulatory Standards

EN 388 is the European standard used to evaluate mechanical risks for hand protection, but more than that, to be legally sold in Europe, a glove has to be EN 388 certified. Gloves with an EN 388 rating must be third-party tested and can be rated for abrasion, cut, tear and puncture resistance.

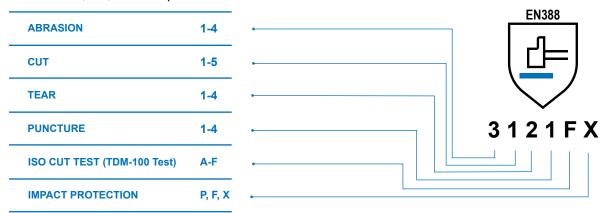

ABRASION The material is subjected to abrasion

by sandpaper under a determined passed over the glove material until it cuts through

CUT The cut protection is tested. A knife is

material apart is measured.

TEAR The force required to tear the glove

PUNTURE Based on the amount of force required

to puncture the material with a tip.

ISO CUT TEST

If the knife gets dull during the coup test, see point 2, this test shall be performed instead. The cut test is rated from A to F, with F being the highest level of cut resistance.

EN407


IMPACT PROTECTION

This is a new test to the EN 388:2016 standard and is optional. It should only be included for gloves that claim specific impact-resistant properties. The rating will score a P(Pass), F(Fail), or X(Not Tested).

EN 407 Regulatory Standards

This standard specifies demands and test methods for protective gloves that shall protect against heat and/or fire. The numbers given besides the pictogram indicate the gloves performance for each test in the standard. The higher number the better the performance level.



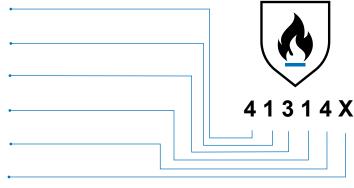

BURNING BEHAVIOR

The ignition time and how long the material glows or burns after ignition is measured in this test. If the seam nes apart after 15 seconds above a flame, the glove has failed the test.

CONTACT HEAT

between + 100°C to + 500°C. Then it is measured how long it takes for the inner side of the glove to become 10°C warmer than it was from the beginning (about 25 ° C degrees). The glove must withstand the increasing at least 15 seconds for approval

CONECTIVE HΕΔΤ

The gloves material is exposed to heat from a gas flame. The amount of time it takes to raise the temperature inside the glove by 24°C is measured. The longer this takes, the higher the resistance of the glove to convective

RADIANT HΕΔΤ

this is done by measuring how long the glove is able to delay heat transfer from a radiant source, the average time is measured for an operation of 2.5W / m²

SMALL SPLASH MOLTEN METAL

This is tested by dropping small amounts of molten metal onto the glove. Based on the number of drops of molten metal, that generates a of molten metal that generates temperature increase between glove material and the skin with 40°C.

LARGESPLASH MOLTEN METAL

The test measures how much molten metal is required to damage material inside the glove. A PVC film is attached to the back of the glove material. Molten iron is poured onto the material. The measurement molten iron is required to damage the PVC film.



CE marking indicates that a product has been assessed by the manufacturer and deemed to meet EU safety, health and environmental protection requirements. It is required for products manufactured anywhere in the world that are then marketed in the EU.

Understanding

Cut Resistant Levels

When looking for the best options for hand protection, it comes to your mind which one do you need to protect your hands from potential injuries such as cuts, tissue injuries, amputations, and burns. To know the right pair of gloves to use for a specific work, it is important to understand the levels of cut resistance. These are standards from the American National Standards Institute (ANSI) and International Safety Equipment Association (ISEA) effective in North America in March 2016 that measures cut resistance for Industrial work gloves on a scale from A1 to A9.

Levels



Material handling, small parts assembly (sharp edge), packaging, warehouse, general purpose, construction.



Medium- High Applications

Application in glass handling, appliance manufacturing, automotive, metal fabrication



High Applications

Application in metal stamping & fabrication, glass handling, constructions



Highest Applications

Appliaction in metal stamping & fabrication, glass handling, recycling, aerospace



Levels Weight in grams needed to cut through materials



200-499 g



500-999 c



1000-1499 g



1500-2199 g



2200-2999 g



3000-3999 g



4000-4999 g



5000-5999 g



6000+ g

ANSI/ISEA and EN388. Where to find them?

Always look for the certification icon printed in the back of each gloves. It is very important to get the proper pair to avoid possible injuries while working.



Dipped Gloves

Choosing the correct glove coating for your job is crucial. That is why we offer various types of coatings to make sure we cover your specific hand protection needs. Palm coatings can influence your glove's performance gripping capabilities in wet and dry conditions, flexibility, temperature, chemicals, oils, abrasion, cut, and puncture resistance.

Coatings



Nitrile

Nitrile coating is a durable material that provides superior puncture and tear resistance. It is mainly used for oily and wet conditions since the nitrille allows liquids to pass quickly through the glove without losing grip and dexterity, therefore performing better in different temperatures than PU.



Polyurethane

Polyurethane (PU) coating provides the user with extra flexibility and dexterity. It offers a lightweight and more breathable material and are also known for their excellent crip without being too sticky.

excellent grip without being too sticky.
PU coatings have versatility among different uses such as light duty jobs, small parts handling, and light manufacturing.



Latex

Latex coating offers great elasticity, durability, and dexterity, it is a good option for wet or dry applications thanks to their material, latex does perform as well with oily or abrasive materials. It has a protein that can generate allergy reactions, you should always make sure if you are allergic to this material.

Grips



Sandy

It increases the gloves grip in both wet and harsh weather conditions. It is not recommended to be used in contact with hydrocarbon-based oils or solvents. Sandy grip provides a high level of flexibility and snagging resistance.



Dotted Palm

It combines the benefits of the Micro-Foam with increased grip performance, without sacrificing its flexibility, breathability, and dexterity performance levels. The Dotted palm provides the user the extra grip required for some jobs.



Foam

It provides the user with excellent dexterity for those who work in wet conditions and oils. The foam behaves like a sponge that absorbs and removes liquids from the palm, providing excellent grip and precision in these conditions.



Crinkle

It is known for their outstanding grip performance in wet and dry conditions. This crinkle is designed to drain liquids away rapidly through its channels to assure a good grip in most circumstances.



Smooth

Without any texture, Smooth grips provides the user with a strong dry grip. As a non-porous grip, it will not absorb any liquids. It is versatile as it has good resistance to hydrocarbon-based oils and solvents.



Micro Foam

The Micro Foam grip acts as a sponge against light oils and water, absorbing them to increase grip performance. This coating is ideal for working with small oily objects, as it also provides excellent dexterity and flexibility. Its porous texture provides comfort and breathability.

Liners





work, and outdoor applications

They are durable and tough, with good flexibility and breathability, with high abrasion resistance can be used in constructions, industrial

Polyester



It's a synthetic fiber with high durability and excellent abrasion resistance, gloves made of this material can be washed and do not shrink when drying, they are a good choice for painting, gardening because the material is





High-Performance Polyethylene (HPPE) has the highest strength to mass ratio of any fiber available, its 10 times stronger than steel, being a material with high abrasion resistance.

Spandex



It's good for applications that need good dexterity and flexibility.High elasticity, lightweight, durable material

Basalt



It's a highly durable and resistant material made of extremely fine fibers of basalt. Applications like industrial work, construction, mining, and handling metal & class

Steel



Very durable and resistant material, with high tensile strength for jobs requiring handling of sharp objects such as glass, small parts with sharp points, construction, and industry.

Gauge

The Gauge of the liner refers to the number of stitches or knitting needles per inch. The higher the gauge, the better the tactile sensitivity and dexterity of the glove.



18 Gauge



15 Gauge



13 Gauge



10 Gauge

Special Features



It can be difficult to find gloves that work with touchscreen phones. Some of our gloves are a lightweight alternative that not only protects your hands, but allows you to text, scroll, stream, and do everything in between.



Outstanding grip performance in wet and dry conditions, assuring a good grip in most circumstances.



Coated gloves with special insert layers that repel water to keep your hands dry or wet, rainy or snow conditions, providing excellent grip and comfort.

Sizing Guide

Knowing the glove size is an important way to increase your performance without losing comfort and dexterity. We use a size identification system based on the color of the cuff, which provides better visual support when choosing the right glove size.



PU Dipped Gloves

GG205



- 3 Abrasion

Hanging Card Ref.

GG205SC

GG205MC

GG205LC

GG205XLC

GG205XXLC

1 - Cut 2 - Tear 1 - Puncture X - ISO Cut Test



12 Pack Ref.

GG205S

GG205M

GG205L

GG205XL

GG205XXL



PU Dipped Gloves

GG206



- 2 Abrasion
- 1 Cut 2 Tear 1 Puncture



Cuff Color

Green

Blue

Gray

Black





Provides a high level of fit, touch and precision

 Black Polyurethane Coating

Hanging Card Ref.	12 Pack Ref.	Cuff Color	Size
GG206SC	GG206S	Green	S (7")
GG206MC	GG206M	Blue	M (8")
GG206LC	GG206L	Gray	L (9")
GG206XLC	GG206XL	Black	XL (10")
GG206XXLC	GG206XXL	Orange	XXL (11")

PU Dipped Gloves

GG207









Cuff Color 12 Pack Ref. Hanging Card Ref. GG207SC **GG207S** Green GG207MC GG207M Blue GG207LC GG207L Gray L (9") GG207XL Black GG207XLC XL (10") GG207XXLC GG207XXL Orange XXL (11")

PU Dipped Gloves

PU Dipped Gloves

Hand Protection

GG208



GG208SC

GG208MC

GG208LC

GG208XLC

GG208XXLC

Hanging Card Ref. 12 Pack Ref.

GG208S

GG208M

GG208L

GG208XL

GG208XXL





Cuff Color

Green

Blue

Gray

Black

Orange



PU Dipped Gloves

GG201



- 4 Abrasion







• 13 Gauge HPPE, Steel,Glass Fiber and Polyester Liner

Hanging Card Ref.	12 Pack Ref.	Cuff Color	Size
GG201SC	GG201S	Green	S (7")
GG201MC	GG201M	Blue	M (8")
GG201LC	GG201L	Gray	L (9")
GG201XLC	GG201XL	Black	XL (10")
GG201XXLC	GG201XXL	Orange	XXL (11")



Hand Protection Latex Gloves

Crinkle Rubber Dipped Gloves

GG209







12 Pack Ref. Cuff Color Size Hanging Card Ref. GG209SC **GG209S** Green S (7") GG209MC GG209M Blue М (8") GG209LC GG209L Gray Т (9") GG209XLC GG209XL XL (10") Black GG209XXLC GG209XXL Orange XXL (11")

Sandy Latex Double Dipped Gloves





- 3 Abrasion

















Hanging Card



12 Pair Packaging

Smooth Nitrile Dipped Gloves

GG215



- 3 Abrasion
- 1 Cut 2 Tear 1 Puncture

Hanging Card Ref.

GG215SC

GG215MC

GG215LC

GG215XLC

GG215XXLC





12 Pack Ref.

GG215S

GG215M

GG215L

GG215XL

GG215XXL



Dotted Palm Micro Foam Nitrile Dipped Gloves

Blue

Gray

Black



Micro Foam Nitrile Dipped Gloves



Fully Dipped Foam Nitrile Gloves



Hi-Vis Sandy Nitrile Dipped Gloves



Micro Foam Nitrile Dipped Gloves



Micro Foam Nitrile Dipped Gloves

GG224 Longer Cuff Reinforced 4 - Abrasion For better protection X - Cut 4 - Tear 2 - Puncture and comfort Thumb Crotch D - ISO Cut Test • 13 Gauge HPPE, Polyester, Steel and Spandex Liner Hanging Card Ref. 12 Pack Ref. Cuff Color Size Black Micro Foam GG224SC **GG224S** Green S (7") **Nitrile Coating** GG224MC GG224M Blue М (8") Gray GG224LC GG224L L (9") GG224XLC GG224XL Black XL (10") GG224XXL GG224XXLC Orange XXL (11")

Micro Foam Nitrile Dipped Gloves



Foam Nitrile Dipped Gloves



Micro Foam Nitrile Dipped Gloves







Hanging Card



12 Pair Packaging

Sandy Nitrile TPR Impact Gloves



Micro Foam Nitrile TPR Impact Gloves



Foam Nitrile TPR Impact Gloves





Leather Gloves



Leather Gloves

Guide

Types of Leather and their Difference

Different types of leather are used in gloves for an array of uses. The most common leather used is cowhide leather, which has two types; Cow Grain and Cow Split.




Cow Grain Leather

The outer layer of the hide is naturally water repellent and very durable in volatile conditions. Cow grain leather is the thickest and most durable type of leather.



Cow Split Leather The bottom layer of the hide. It has better abrasion and

The bottom layer of the hide. It has better abrasion and heat resistance. Also, provides smoother texture and flexibility.



Thumb Types

Different types of thumb designs are used in leather gloves which offer better dexterity depending on the different work environments. The most common are straight thumb, wing thumb, and keystone thumb.




Winged Thumb

Is a continuous full leather thumb with a reinforced sewn in the bottom. Its design is excellent for gripping work like screw, hammer, shoveling.



Straight Thumb

This design has stitching on the inside of the glove, which provides an extension of the life of the glove, this avoiding unpicking. It's design is excelent for push or open handed work



Keystone Thumb

This design has the thumb separated from the glove, stitching it in a way that provides greater comfort to the user, being one of the most versatile.

Special Features



It's the highest quality leather available. It has had imperfections removed or corrected using different methods such as sanding or buffing, giving an excellent finish and a better feel when using the glove.

Aramid Stitching

It is one of the most resistant commercial yarns of all, it is made for applications in which the contact with heat is constant since it resists high heat temperatures and remains firm without any risk of unrayeling.



Coated gloves with special insert layers that repel water to keep your hands dry or wet, rainy or snow conditions, providing excellent grip and comfort.

EN 12477 describes how welding gloves should be made to provide adequate hand and fist protection, welding gloves should be tested based on EN388:2016 and EN 407:2004.

EN 12477 Type A refers to gloves with high protection but with lower dexterity and flexibility.

Type B refers to gloves with low protection but with good dexterity and flexibility.

Cow Grain Leather Driver Gloves

GG301





- 3 Abrasion 1 - Cut 4 - Tear 3 - Puncture
 - X ISO Cut Test



· Sewn with

Hanging Card Ref.	12 Pack Ref.	Size
GG301SC	GG301S	S (7")
GG301MC	GG301M	M (8")
GG301LC	GG301L	L (9")
GG301XLC	GG301XL	XL (10")
GG301XXLC	GG301XXL	XXL (11")



Cow Grain Leather Driver Gloves

GG304









Hanging Card Ref.	12 Pack Ref.	Size
GG302SC	GG302S	S (7")
GG302MC	GG302M	M (8")
GG302LC	GG302L	L (9")
GG302XLC	GG302XL	XL (10")
GG302XXLC	GG302XXL	XXL (11")



Cow Grain Leather Driver Gloves

GG306





- - 3 Abrasion 1 - Cut 4 - Tear 3 - Puncture X - ISO Cut Test
- (€

Hanging Card Ref.	12 Pack Ref.	Size
GG306SC	GG306S	S (7")
GG306MC	GG306M	M (8")
GG306LC	GG306L	L (9")
GG306XLC	GG306XL	XL (10")
GG306XXLC	GG306XXI	XXI (11")



Cow Grain Leather Driver Gloves

GG307





- 4 Abrasion 4 - Abrasion 1 - Cut 4 - Tear 3 - Puncture X - ISO Cut Test
 - Reinforced Palm

Hanging Card Ref.	12 Pack Ref.	Size
GG307SC	GG307S	S (7")
GG307MC	GG307M	M (8")
GG307LC	GG307L	L (9")
GG307XLC	GG307XL	XL (10")
GG307XXLC	GG307XXL	XXL (11")



Cow Split Leather Driver Gloves

GG303





- 3 Abrasion 1 - Cut 4 - Tear 3 - Puncture
- X ISO Cut Test

Hanging Card Ref.	12 Pack Ref.	Size
GG303SC	GG303S	S (7")
GG303MC	GG303M	M (8")
GG303LC	GG303L	L (9")
GG303XLC	GG303XL	XL (10")
GG303XXLC	GG303XXL	XXL (11")





Cow Split Leather Driver Gloves

GG305





- 1 Cut 3 Tear 3 Puncture X ISO Cut Test

Hanging Card Ref.	12 Pack Ref.	Size
GG305SC	GG305S	S (7")
GG305MC	GG305M	M (8")
GG305LC	GG305L	L (9")
GG305XLC	GG305XL	XL (10")
GG305XXLC	GG305XXL	XXL (11")



Cow Split Leather Palm Gloves









• Knuckle Protection



Hanging Card Ref.	12 Pack Ref.	Size	
GG320MC	GG320M	M	(8")
GG320LC	GG320L	L	(9")
GG320XLC	GG320XL	XL	(10")





Cow Split Leather Palm Gloves

GG321





- 4 Abrasion 2 - Cut 4 - Tear 4 - Puncture X - ISO Cut Test
- Rubberized safety cuff

Knuckle Protection





Hanging Card Ref.	12 Pack Ref.	Size	
GG321MC	GG321M	8) M	3")
GG321LC	GG321L	L (9)")
GG321XLC	GG321XL	XL (1	0")





Cow Split Leather Palm Gloves


GG322

















Hand Protection Welding Gloves

Cow Split Leather Welding Gloves









Mechanics Gloves



Impact Resistant

Standards

ANSI/ISEA 138-2019


This standard is used to evaluate the protection and the resistance of the gloves for impact sets requirements of gloves designed to protect the knuckles and fingers of direct impact to the hand from external objects. The impact resistance is classified in levels 1, 2, and 3, where level 1 equals the lowest level of impact resistance and level 3 equals the highest level of performance.





LOW Perfomance

Mean $(kN) \le 4 / All \ Impact (kN) \le 5$





MEDIUMPerfomance

Mean $(kN) \le 6.5 / All \ Impact (kN) \le 8.1$







HIGH Perfomance

Mean $(kN) \le 9 / All Impact (kN) \le 11$

EN388 Regulatory Standard

This standard is used to evaluate mechanical risks for hand protection, but more than that, to be legally sold in Europe, a glove has to be EN 388 certified. Gloves with an EN 388 rating must be third-party tested and can be rated for abrasion, cut, tear and puncture resistance.



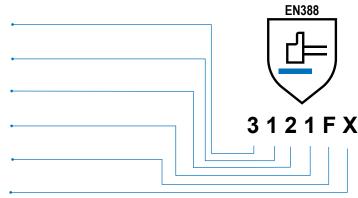

ABRASION

The material is subjected to abrasion by sandpaper under a determined

CUT

The cut protection is tested. A knife is passed over the glove material until it cuts through.

TEAR

The force required to tear the glove material apart is measured.

PUNTURE

Based on the amount of force required to puncture the material with a tip.

ISO CUT TEST

If the knife gets dull during the coup test, see point 2, this test shall be performed instead. The cut test is rated from A to F, with F being the highest level of cut resistance.

IMPACT PROTECTION

This is a new test to the EN 388:2016 standard and is optional. It should only be included for gloves that claim specific impact resistant properties. The rating will score a P(Pass), F(Fail), or X(Not Tested).



CE marking indicates that a product has been assessed by the manufacturer and deemed to meet EU safety, health and environmental protection requirements. It is required for products manufactured anywhere in the world that are then marketed in the EU.

Understanding Impact Resistant Levels


This type of gloves is generally used in places where the risk of having an accident in the hand is higher than normal and heavy-duty protection is required. There are 3 levels of impact resistance, the lowest level is 1 and the highest is 3, these gloves are mainly used in industrial areas such as Oil & Gas, mining, exploration, fishing, quarrying. To know what level will be the glove, these are subjected to a test in which they are thrown a mass of 2-5 or 5 kgs in the area of the TPR and is measured based on Mean Transmitted Force (MTF), the MTF is measured in kilonewtons (kN) which means that the lower the measurement in kilonewtons, the better the dispersion of the glove.

The Importance of Using Mechanics Gloves

According to different studies, the second most injured part is the hand, there are many ways to hurt the hand by punctures, but one of the most common causes according to the National Safety Council, is through some kind of blow by heavy machinery, and likewise being injuries that can cost between 400-25000\$, you should not only be aware of the work area in which you are, but you should also protect yourself as best as possible to avoid possible injuries in high-risk areas.

ANSI/ISEA 138-2019 Testing Process

The ANSI/ISEA 138-2015 is used to measure the gloves impact protection, starting from the knuckles to the fingers area. The middle and little fingers testing area is measured 5 cm from the fingertip. On the index, ring, and thumb fingers, the testing area is 2.5 cm from the fingertip.

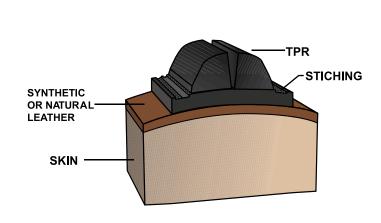

TPR Layers

Our TPR gloves are designed to generate excellent impact protection, made of 3 layers and thick TPR that repels impact without damaging your hand, are made of 6 mm TPR, highly durable stitching, and made of 100% natural or high-quality synthetic leather.





Mechanics Gloves

GG400



- 2 Abrasion 1 Cut 1 Tear 1 Puncture











Hanging Card Ref.	Size
GG400SC	S (7")
GG400MC	M (8")
GG400LC	L (9")
GG400XLC	XL (10")
GG400XXLC	XXL (11")

Mechanics Gloves

GG401



- 2 Abrasion 1 Cut 1 Tear 1 Puncture X ISO Cut Test









Hanging Card Ref.	Size
GG401SC	S (7")
GG401MC	M (8")
GG401LC	L (9")
GG401XLC	XL (10")
GG401XXLC	XXL (11")

Hi-Vis Mechanics Gloves

GG402



- 2 Abrasion 1 Cut 3 Tear 1 Puncture X ISO Cut Test





	0.
Hanging Card Ref.	Size
GG402SC	S (7")
GG402MC	M (8")
GG402LC	L (9")
GG402XLC	XL (10")
GG402XXLC	XXL (11")



Pro Mechanics Gloves

GG410



- 2 Abrasion 2 Cut 4 Tear 1 Puncture
- X ISO Cut Test



Size

S (7")

М (8")

XL (10")

L (9")

- Shirred elastic secure fit

Slip on cuff

spandex material





Reinforced

XXL (11") **Pro Mechanics Gloves**

GG411

Hanging Card Ref.

GG410SC

GG410MC

GG410LC

GG410XLC

GG410XXI C



- 2 Cut 4 Tear 1 Puncture X ISO Cut Test



Size

S (7")

M (8")

(9")

XL (10")

XXL (11")

Spandex

secure fit

cuff

Material



Pro Mechanics Leather Gloves

GG419

Hanging Card Ref.

GG411SC

GG411MC

GG411LC

GG411XLC

GG411XXLC



- 2 Abrasion 2 Cut 2 Tear 1 Puncture X ISO Cut Test





 Spandex material

Hanging Card Ref.	Size
GG419SC	S (7")
GG419MC	M (8")
GG419LC	L (9")
GG419XLC	XL (10")
GG419XXLC	XXL (11")



Leather Impact Resistant Work Gloves

Reinforced **GG415** fingers Breathable airprene Touch screen cuff compatible 100% Genuine Goat Leather Terry cloth Impact resistant TPR sweat wipe Reinforced palm Hanging Card Ref. Size GG415SC S (7") TPR velcro GG415MC (8") cuff Pull strap GG415LC

Synthetic Leather Impact Resistant Gloves

GG416

GG415XLC

GG415XXI C



- 3 Abrasion
- 1 Puncture X ISO Cut Test



L (9")

XL (10")

XXL (11")











Hanging Card Ref.	Size
GG416SC	S (7")
GG416MC	M (8")
GG416LC	L (9")
GG416XLC	XL (10")
GG416XXLC	XXL (11")



PATENT PENDING

PATENT PENDING

Hi-Vis Synthetic Leather Impact Resistant Gloves

GG417











Hanging Card Ref.	Size	
GG417SC	S (7")	
GG417MC	M (8")	
GG417LC	L (9")	
GG417XLC	XL (10")	
GG417XXLC	XXI (11")	



PATENT PENDING

Impact Cut Resistant Driver Gloves

GG421













Hanging Card Ref.	Size
GG421SC	S (7")
GG421MC	M (8")
GG421LC	L (9")
GG421XLC	XL (10")
GG421XXLC	XXL (11")

Oil & Gas Impact Resistant Gloves

GG422











Hanging Card Ref.	Size
GG422SC	S (7")
GG422MC	M (8")
GG422LC	L (9")
GG422XLC	XL (10")
GG422XXLC	XXL (11")



Reusable Gloves



Reusable Gloves Standards

EN 374 Regulatory Standards

EN 374 is the European standard used to evaluate the requirements for a glove to protect against dangerous liquids chemicals and micro-organisms, this standard tests the degradation and permeation from different chemicals.

Standard Level

EN 374-1

Specifies the requirements for protection against chemicals and microorganisms, also, defines the terms used in the standard.



Describes and specifies a test method for the penetration resistance of gloves protecting against chemicals and/or microorganisms.

EN 374-3

Specifies the method for determining the resistance of glove materials to the permeation of potentially hazardous, non-gaseous chemicals under recurrent contact conditions.



Basic protection

The "Low chemical resistance" pictogram is used for those gloves that did not meet the 30 minutes resistance time with 3 different chemicals but passed the penetration test.



Specific protection

Indicates that this glove protects against certain liquid chemicals with a time exceeding 30 minutes for at least three out of a list of twelve chemicals, chemicals are identified by letters




Microorganism protection

Specifies whether the gloves are effective against liquids and microorganisms. Performance levels are according to AQL (Acceptable Quality Levels). Samples are taken from each production batch and tested for leaks by air or water inflation.

Specific Protection - Hazardous Compounds

Code	Chemical	Code	Chemical
Α	Methanol	G	Diethylamine
В	Acetone	Н	Tetrahydrofuranne
С	Acetonitrile	I	Elthyl acetate
D	Dichloromethane	J	n-Heptane
E	Carbon disulphide	K	Sodium hydroxide 40%
F	Toluene	L	Sulphuric Acid 96%



Pictograms



Cut and tear resistant

All our gloves have cut and tear resistance, providing greater protection, safety, and less risk of damage.



Anti microbial

It is ideal for conditions that warrant greater protection against microbes it is ideal for cleaning high traffic areas, bathrooms,



Good dexterity

Our gloves are designed to provide excellent dexterity and comfort, adapting to any type of hand shape.



Chlorinated

is a special process using chlorine-based water treatment in the gloves, thus providing greater resistance to certain mild chemicals.



Chemical resistance

Most of our gloves are resistant to certain liquid chemicals, always make sure you know what product and what type of use you are going to give the glove to avoid injuries.



Food stuff compliance

Ensures that gloves can be used in the food industry without putting food at risk or leaving chemical residues on the food.

Latex Gloves

GG500















Ref.	Color	Size	Length	Palm Width
GG500S	Blue	S (6-6 ½)	S (12") (300±10mm)	S (3.5") (90±5mm)
GG500M	Blue	M (7-7 ½)	M (12") (300±10mm)	M (3.9") (100±5mm)
GG500L	Blue	L (8-8 ½)	L (12") (300±10mm)	L (4.3") (110±5mm)
GG500XL	Blue	XL (9-9 ½)	XL (12") (300±10mm)	XL (4.7") (120±5mm)
GG500XXL	Blue	XXL (10-10 ½)	XXL (12") (300±10mm)	XXL (5.1") (130±5mm)

Latex Gloves

GG503


















Heavy Duty







Neoprene Coated Gloves

GG501



1 - Abrasion









· Internal flock lining adds comfort fit



Ref.	Color	Size	Length	Palm Width
GG501S	Indigo & Gray	S (6-6 ½)	S (13") (330±10mm)	S (3.7") (95±3mm)
GG501M	Indigo & Gray	M (7-7 ½)	M (13") (330±10mm)	M (4.2") (107±3mm)
GG501L	Indigo & Gray	L (8-8 ½)	L (13") (330±10mm)	L (4.4") (113±3mm)
GG501XL	Indigo & Gray	XL (9-9 ½)	XL (13") (330±10mm)	XL (4.6") (118±3mm)
GG501XXL	Indigo & Gray	XXL (10-10 ½)	XXL (13") (330±10mm)	XXL (4.8") (123±3mm)



Neoprene Gloves

GG520



















Heavy Duty

Ref.	Color	Size	Length	Palm Width
GG520S	Black	S (6-6 ½)	S (13") (330±10mm)	S (3.7") (95±3mm)
GG520M	Black	M (7-7 ½)	M (13") (330±10mm)	M (4.2") (107±3mm)
GG520L	Black	L (8-8 ½)	L (13") (330±10mm)	L (4.4") (113±3mm)
GG520XL	Black	XL (9-9 ½)	XL (13") (330±10mm)	XL (4.6") (118±3mm)
GG520XXL	Black	XXL (10-10 ½)	XXL (13") (330±10mm)	XXL (4.8") (123±3mm)

Nitrile Gloves

GG530



4 - Abrasion 1 - Cut 0 - Tear 2 - Puncture







Ref.

GG530S

GG530M

GG530L

GG530XL

GG530XXL









Latex Free

Color

Indigo

Indigo

Indigo

Indigo

Indigo



Size

(6-6 1/2)

(7-7 1/2)

(8-8 1/2)

(9-9 1/2)

XXL (10-10 ½)

S

M

XL



Length

(13") (330±10mm)

(13") (330±10mm)

XXL (13") (330±10mm)

S

XL



(4.4") (113±3mm)

(4.6") (118±3mm)

XXL (4.8") (123±3mm)

L

XL







Nitrile Gloves



Hand Protection Nitrile Gloves

4 Mil Nitrile gloves

GG600 / GG601



100 Pack Ref.

GG600M

GG600L

GG600XL



Color

Blue

Blue

Blue

100 Pack Ref.

GG601M

GG601L

GG601XL

100 Pack Ref.

GG611M

GG611L

GG611XL

100 Pack Ref.

GG622M

GG622L

GG622XL

Color

Black

Black

Black

Color



GG600 / GG601

6 Mil Nitrile gloves

GG610 / GG611



100 Pack Ref.

GG610M

GG610L

GG610XL



Color

Blue

Blue

Blue



GG610 / GG611

8 Mil Nitrile gloves

GG621 / GG622



100 Pack Ref.

GG621M

GG621L

GG621XL





Color

Black

Black

Black



GG621 / GG622







ANSI 107-2020

Class & Types

This certification is provided by the American National Standards Institute (ANSI) so that certain guidelines are followed when developing high visibility clothing, when choosing them and when to use each type of high visibility garment for the desired applications.

Type 0



Provides a moderate level of visualization, designed for use in work areas where there is no heavy machinery, complex viewing environment, or that are close to any type of high-speed road.

Class 1



Intended for workers who are in a low hazard area, i.e. away from roads and work areas of very complex view.

Class 3



For workers who are in accident-prone locations, such as high-speed roads (above 50 mph), providing high visibility in 360 degrees. Provides maximum body coverage and visibility of low light and long-range conditions.

Type R



Designed to provide high visibility and is made for use in day and night environments, in workplaces that are visually complex and are ideal for use in high-speed road and machinery work nearby.

Class 2



For workers who are in accident-prone locations, such as high-speed roads (below 50 mph), providing high visibility in 360 degrees.

Class E



This type does not fit into the numbering system, instead, class E is additional garments to increase the worker's visibility, such as reflective pants, high visibility jackets, or rain pants. if a class E garment is added (for example, high visibility pants) and the worker is wearing a class 2 safety vest, because of the outfit he/she is wearing, it will be considered class 3 attire, if the worker is wearing a class 1 safety vest and class E is added, it will be considered class 2 attire

















Safety Vest



Safety Vest with Contrasting Trims



Safety Vest with Contrasting Trims



Expandable 5 Point Breakaway Vest



Heavy Duty Engineer Vest with Contrasting Trims



Heavy Duty Surveyor Vest



Class 3 Vest with Contrasting Trims

GV092



2 Pockets

Ref.	Color	Size
GV092GS	Green	S
GV092GM	Green	М
GV092GL	Green	L
GV092XL	Green	XL
GV092XXL	Green	XXL









Coverall Certifications & Materials

Explained

Certifications



EN 14605

Protective clothing for the whole body (trunk, arms, and legs), Protects against a pressurized or direct jet of liquid chemicals.



EN 1073-2

Protective clothing against radioactive particulate contamination.

TYPE 4

EN 14605

EN 14605

Protective clothing for the whole body (trunk, arms, and legs), Protects against saturated splash of liquid chemicals.



EN 1073-2

Protective clothing with electrostatic properties.



EN ISO 13982-1

EN 14605

Protective clothing for the whole body (trunk, arms, and legs), only applies to airborne solid particles, they should not be used for liquid chemicals, certain solid products in the form of dust.



EN 14126


Protective clothing against infective agents.



EN 13034:2005

Protective clothing for the whole body (trunk, arms, and legs), protects against a light spray of liquid chemicals.

Materials

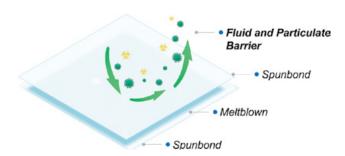


SMS

(Spunbond, Meltblown, Spunbond)

This is a type of nonwoven fabric that combines spunbond and meltblown fabrics is a good liquid repellent.

Microporous

Provides excellent protection against nonhazardous liquids and at the same time, it provides good breathing to the body in hot working environments providing good comfort.

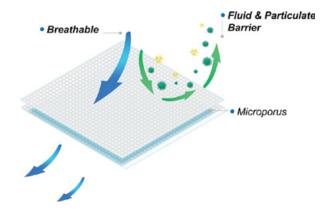

SMS Protective Coverall

GW900 Collar • Zipper Flap with adhesive Elastic wrist GSM-SMS₁ ¹Material •Elastic ankle





GW900

Ref.	Coverall Style	Color	Size
GW900M	Collar	○ White	M
GW900L	Collar	○ White	L
GW900XL	Collar	○ White	XL
GW9002XL	Collar	White	XXL
GW9003XL	Collar	O White	XXXL



SMS Protective Coverall







Ref.	Coverall Style	Color	Size
GW901M	Hood	○ White	М
GW901L	Hood	○ White	L
GW901XL	Hood	○ White	XL
GW9012XL	Hood	○ White	XXL
GW9013XL	Hood	○ White	XXXL



Microporous Protective Coverall



Ref.	Coverall Style	Color	Size
GW902M	Collar	○ White	М
GW902L	Collar	○ White	L
GW902XL	Collar	○ White	XL
GW9022XL	Collar	White	XXL
GW9023XL	Collar	○ White	XXXL



Microporous Protective Coverall



Ref.	Coverall Style	Color	Size
GW903M	Hood & Boots	○ White	М
GW903L	Hood & Boots	○ White	L
GW903XL	Hood & Boots	○ White	XL
GW9032XL	Hood & Boots	○ White	XXL
GW9033XL	Hood & Boots	○ White	XXXL





Microporous Protective Coverall



		GW904		
Ref.	Coverall Style	Color	Size	
GW904M	Hood	○ White	М	
GW904L	Hood	○ White	L	
GW904XL	Hood	○ White	XL	
GW9042XL	Hood	○ White	XXL	
GW9043XL	Hood	○ White	XXXL	





Seam Taped Protective Coverall



Ref.	Coverall Style	Color	Size
GW905M	Hood	○ White	М
GW905L	Hood	○ White	L
GW905XL	Hood	○ White	XL
GW9052XL	Hood	○ White	XXL
GW9053XI	Hood	○ White	XXXI






Reflective Protective Coverall









Seam Taped Protective Coverall



Ref.	Coverall Style	Color	Size
GW907M	Hood	Yellow	М
GW907L	Hood	Yellow	L
GW907XL	Hood	Yellow	XL
GW9072XL	Hood	Yellow	XXL
GW9073XL	Hood	Yellow	XXXL











Standards



The Z87.1 ANSI references the standards and guidelines for Eyewear protection. certifying that the product complies with and provides the necessary protection to the wearer from liquid splashes, small object impacts, and dust.



EN 166:2001 specifies the guidelines or basic requirements for Eyewear protection, based on the European specification standards.



EN 166:2001 specifies the guidelines or basic requirements for Eyewear protection, based on the European specification standards.

Lens Options



Clear

90% light transmission Clear lenses offer consistent optical clarity providing the clearest and most natural vision possible.

Amber

85% light transmission
The amber tint lightens and adds contrast to
shapes and shadows, giving better detail to
the contours of objects, it is recommended
for use in places where the sun makes it
difficult to distinguish details.

I/O Mirror

46% light transmission
Mirrored glasses allow (as smoking) a
significant reduction of light, thus reducing
eve pain and fatigue for the wearer.



Smoke

23% light transmission
The smoke lens allows minimal light
transmission, reducing eye fatigue and eye
strain at high brightness.



Blue Mirror

26% light transmission
The blue mirror lens enhances the contours around objects and improves color perception.
Wear them to reduce glare during snowy conditions.

Anti-Fog Clear View



Foggy lenses are very common for people who work with personal protective equipment and are a huge inconvenience and safety risk to workers. The anti-fog lenses will stop your glasses from fogging up, providing you with clear vision.

Features









Ideal middle ground lenses transmit more visible Protect your eyes for longer, with scratch-light than typical outdoor lenses, yet can still resistant glasses made of strong and resistant against the sunlight's UV ray. 99.9% UV protection have no metal parts, insulating against electricity. protect your eyes from sunlight and glare while polycarbonate, ideal for all types of work outdoors. And allow more light than amber lenses. to let through enough light for effective visibility in

allows you to see easier and clearly in bright-light conditions, while protecting your eyes against the harmful effects of the sun.

Wearing non-conducting safety gear reduces the chances of an accidental electrical discharge and helps to minimize injury during an electrical

Choosing the right frame

It is extremely important safety eyewear fit properly. A lens base curve is the measure of the general shape of the lens. The higher the base curve, the more curvature there is in a lens, the more curvature the lens has the more it wraps around the face, creating more coverage and increasing side protection.







Frameless

Frameless Safety Glasses are a good choice for lightweight and style. Designed to obtain a better range of vision without having to take them off

Full Frame

The design allows them to be very resistant, ideal for jobs that require a lot of movement. Allows maximum protection against the sun's rays, their wrap-around design fully protects your eyes

Half Frame

The design allows them to be very comfortable and lightweight, allowing them to have a better range vision to front and side



Spoggle

A combination of the beneficial uses of both spectacles and goggles, the "Spoggles" offer both safety and comfort, with its adjustable headband and inner-foam gasket.




Over The Glass


OTG goggles are designed to wear with most prescription glasses, protecting your eyes from impact, liquids, and particulates.





Ref.	Frame	Lens	Coating	Weight (gm)
GE203C	Gray	○ Clear	Anti-Scratch	19.8
GE203CAF	Gray	○ Clear	Anti-Fog / Anti-Scratch	19.8
GE203AAF	Gray	Amber	Anti-Fog / Anti-Scratch	19.8
GE203SAF	Gray	Smoke	Anti-Fog / Anti-Scratch	19.8

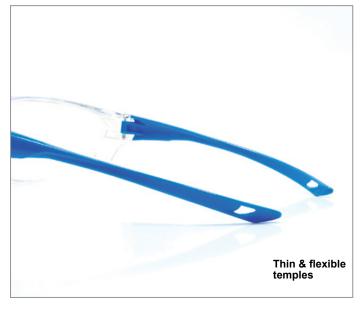

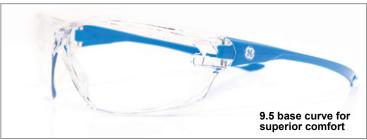








Ref.	Frame	Lens	Coating	Weight (gm)
GE205C	Black & Blue	○ Clear	Anti-Scratch	24.5
GE205CAF	Black & Blue	○ Clear	Anti-Fog / Anti-Scratch	24.5
GE205C	Black & Blue	Smoke	Anti-Fog / Anti-Scratch	24.5
GE205CAF	Black & Blue	I/O Mirror	Anti-Fog / Anti-Scratch / Indoor-Outdoor	24.5








GE205MAF

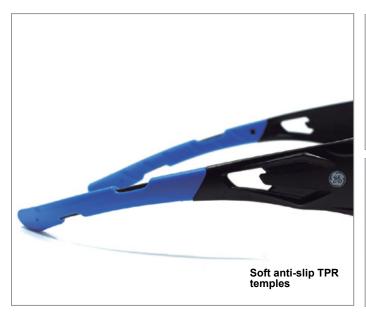





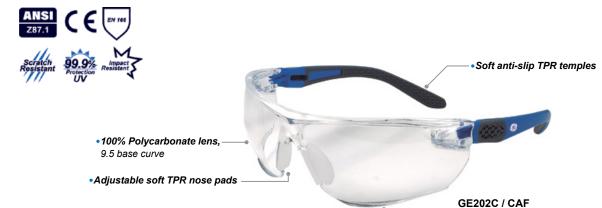




Ref.	Frame	Lens	Coating	Weight (gm)
GE202C	Blue & Gray	○ Clear	Anti-Scratch	26
GE202CAF	Blue & Gray	Clear	Anti-Fog / Anti-Scratch	26





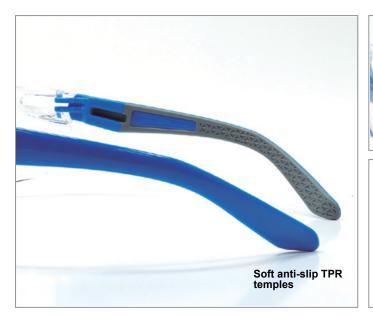





Black & Blue

Blue Mirror

04 Series

GE104BAF



32.2




Anti-Fog / Anti-Scratch











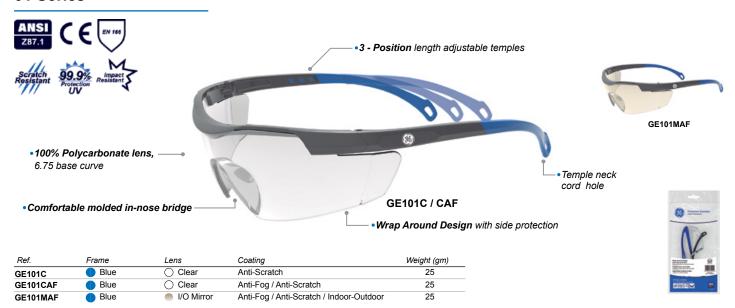



Ref.	Frame	Lens	Coating	Weight (gm)
GE201CAF	Black	○ Clear	Anti-Scratch	25
GE201SAF	Black	Smoke	Anti-Fog / Anti-Scratch	25

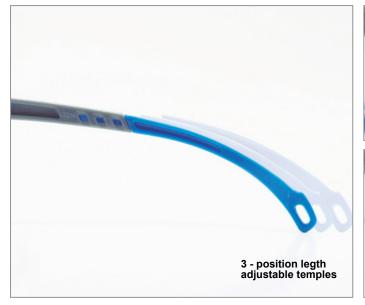

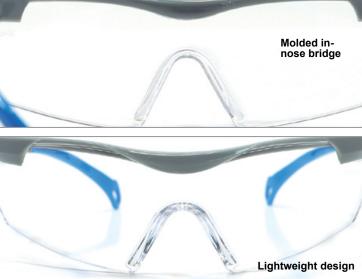



Ref.	Frame	Lens	Coating	Weight (gm)
GE106C	Black & Blue	○ Clear	Anti-Scratch	28.1
GE106CAF	Black & Blue	○ Clear	Anti-Fog / Anti-Scratch	28.1
GE106SAF	Black & Blue	Smoke	Anti-Fog / Anti-Scratch	28.1
GE106BAF	Black & Blue	Blue Mirror	Anti-Fog / Anti-Scratch	28.1
GE106MAF	Black & Blue	I/O Mirror	Anti-Fog / Anti-Scratch / Indoor-Outdoor	28.1






Ref.	Frame	Lens	Coating	Weight (gm)
GE206C	Blue & Black	○ Clear	Anti-Scratch	28.1
GE206CAF	Blue & Black	○ Clear	Anti-Fog / Anti-Scratch	28.1
GE206SAF	Blue & Black	Smoke	Anti-Fog / Anti-Scratch	28.1







08 Series

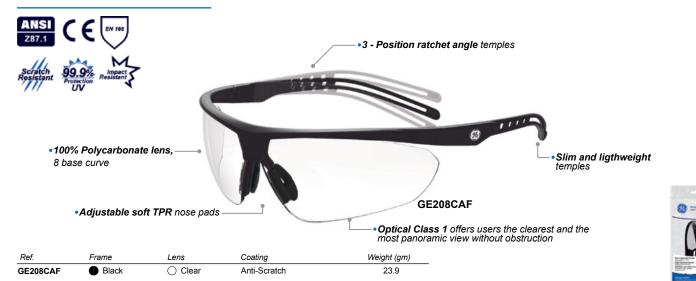


(0) (p) (s)	
	\$ ''''
	GE308C / CAF

Ref.	Frame	Lens	Coating	Weight (gm)
GE308C	Black	○ Clear	Anti-Scratch	23.9
GE308CAF	Black	○ Smoke	Anti-Fog / Anti-Scratch	23.9





Soft and anti-slip nose pads

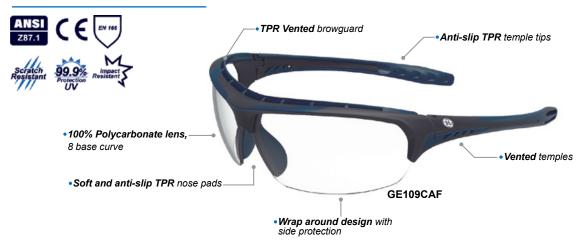

Ref.	Frame	Lens	Coating	Weight (gm)
GE109CAF	Black & Blue	○ Clear	Anti-Fog / Anti-Scratch	31
GE109SAF	Black & Blue	Smoke	Anti-Fog / Anti-Scratch	31
GE109BAF	Black & Blue	Blue Mirror	Anti-Fog / Anti-Scratch	31
GE109MAF	Black & Blue	I/O Mirror	Anti-Fog / Anti-Scratch / Indoor-Outdoor	31











05S Series



Ref.	Frame	Lens	Coating	Weight (gm)
GE105CAF	Black & Blue	○ Clear	Anti-Fog / Anti-Scratch	42.7









Protective Eyewear

Indigo & Gray

O Clear

Anti-Fog / Anti-Scratch

11S Series


GE111CAF




33.8





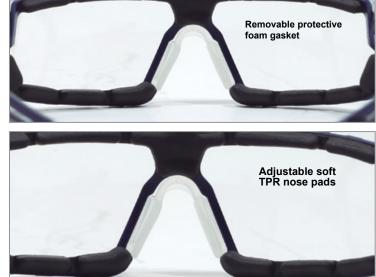



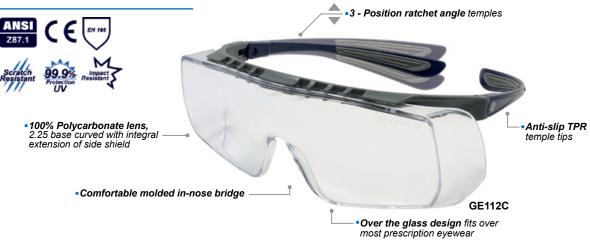





 Ref.
 Frame
 Lens
 Coating
 Weight (gm)

 GE112C
 ● Gray & Indigo
 ○ Clear
 Anti-Scratch
 35.2



Ref.	Frame	Lens	Coating	Weight (gm)
GF212S	Black & Indigo	Smoke	Anti-Scratch	35.2













NRR & ANSI S3.19-1974 **Explained**

The U.S. Environmental Protection Agency (EPA) has selected the Noise Reduction Rating (NRR) as the measure of hearing protection devices noise-reducing capabilities.

The level of noise entering a person's ear when a hearing protector is worn as directed is closely approximated by the difference between the A-weighted environmental noise level and the NRR. Example:

- 1. The environmental noise level as measured at the ear is 92 dB (A).
- 2.The NRR is 23 decibels (dB).
- 3. The level of noise entering the ear is approximately equal to [92-26 dB(A)] 66 dB(A).

For noise environments dominated by frequencies below 500 Hz, the C-Weighted environmental noise level should be used. The NRR used in the above example was achieved under laboratory conditions.

When choosing hearing protection equipment, make sure you are choosing one with the dB you need to avoid hearing damage.




ANSI S3.10-1974 Standard

Hearing protection equipment must meet this standard to certify that it protects against different noise levels. All products must pass rigorous quality and standards tests at authorized locations before the model can be sold with the NRR label.

(dB) Meaning

The Decibel (dB) is a unit for expressing and comparing the loudness of two different sounds

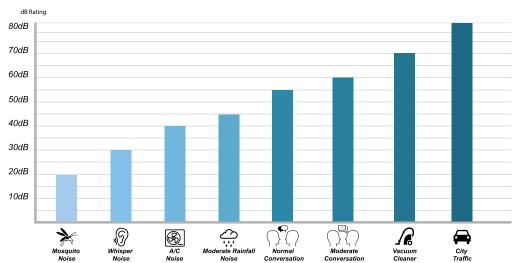

Protective Earmuff

GM450





Color GM450 Blue & Black

 Durable & comfortable headband Compact, lightweight & portable design Soft padding on earcups provides maximum comfort and protection from noises



Folding Protective Earmuff

GM451







GM451 Indigo & Black Strong stainless steel

· Adjustable headband

· Adjustable headband



Cushioned headband for maximum comfort

Soft padding on earcups provides maximum comfort and protection from noises

Adjustable earcup pivot points tilt for wearers comfort



Protective Earmuff

GM452





Color GM452 Gray & Black Strong stainless steel

Compact, lightweight & portable design



Cushioned headband for maximum comfort

Soft padding on earcups provides maximum comfort and protection from noises

Adjustable earcup pivot points tilt for wearers comfort



High Visibility Protective Earmuff





Behind-The-Neck Earmuff



Bullet Shaped Earplugs



Ref.	Cord Type	Pairs	Pack
GP425	Uncorded	200 Pairs	Box
GP426	Corded	100 Pairs	Box
GP427	Uncorded	5 Pairs with case	Blister

Bullet Shaped Earplugs













Ref. Cord Type Pairs **GP428** 50 Pairs Uncorded Bag **GP429** Uncorded 100 Pairs Bag 250 Pairs **GP430** Uncorded Bag GP431 Uncorded 500 Pairs Bag

Earplugs Dispenser





Reusable Earplugs





Ref.	Cord Type	Pairs	Pack
GP439	Uncorded	200 Pairs	Box
GP440	Corded	100 Pairs	Box
GP445	Corded	3 Pairs with case	Blister

Bell Shaped Earplugs








G	P	4	4	4

Ref.	Cord Type	Pairs	Pack	
GP444	Corded	2 pairs with case	Blister	_

Foam Banded Earplugs

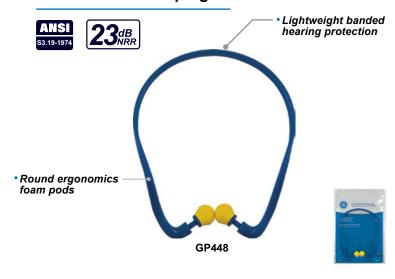

Ref. Color
GP448 Yellow & Blue



Ergonomics



Certifications & Materials

Explained

EN 14404

This standard evaluates the performance and the type levels of knee protection, for all the occupations involving kneeling work, it is important to use knee protection when working for long periods of time in this position, as it can cause long-term discomfort, discomfort, and even some kind of injury.

Types

EN14404



Type 1

Knee protections independent of any garment and attached around the leg.

EN14404



Type 2

Plastic foam inserted into the leg reinforcements of a pair of pants.

EN14404



Type 3

Equipment that is not attached to the body, but is put in place when the user moves.

EN14404



Type 4

Accessories with additional functions to assist in getting up or kneeling down.

Protective Class

Class 0

Recommended for flat floors - no penetration resistance required

Class 1

Recommended for flat floors - required penetration resistance of at least 100 N

Class 2

Recommended for complex conditions (rocks, uneven ground, etc.) require a penetration resistance of at least 250 N.

Knee Pads Components

Protective Caps

The caps provide greater comfort, protection, and stability when working in environments with uneven floors, thanks to the thick layer covering the knee pad. GR551 (PVC) & GR553 (TPE)

Thick Foam

The GR550, GR551, and GR553 models feature thick foam to reduce the pressure exerted against the gel, thus providing less pressure on the knee and longer gel life thanks to this protective layer.

Soft Gel Core

The GR551 and GR553 models contain a protective gel high density, which means that when any kind of pressure is exerted, it is dispersed in such a way that the knee can rest comfortably, supporting long kneeling days work.

Breathable Mesh

All our kneepads are made with a breathable mesh material, dissipating heat and humidity generated by the day and working hours



Ergonomics

Back Support

GR540



Ref.	Color	Size
GR540S	Black	S
GR540M	Black	М
GR540L	Black	L
GR540XI	■ Black	ΧI





High Performance Back Support

GR541

Adjustable suspenders

 4" Adjustable double sidebands for maximum support

Ref.	Color	Size
GR541S	Black	S
GR541M	Black	М
GR541L	Black	L
GR541XI	■ Black	ΧI



•Flexible & breathable mesh fabric provides lightweight comfort







High Visibility Back Support

GR542

 8" Wide heavy duty back panel

Ref.	Color	Size
GR542S	Green & Black	S
GR542M	Green & Black	М
GR542L	Green & Black	L
GR542XL	Green & Black	XL





Ergonomics

Knee Pads

GR550



GR550

Type 2

Color

Black

 Designed to comfortably fit over or underpants

> Medium-density EVA foam for comfort and longevity



GR551

GR553

 Low profile contour for easy movement



 Flexible neoprene strap for easy adjustment



Knee Pads

GR551



GR551

Type 2

Black & Blue

 Flexible neoprene straps to easy adjust and fit tightly

- • Quick release slide clip



• Heavy-duty thick PVC cap

• Soft gel core & durable EVA foam padding



GR553



Type 2

 Breathable and comfortable neoprene strap for easy adjustment



 TPE cap provides stable, shift-free grip and traction on most surfaces







Respiratory Protection



Respiratory Protection

N95 Cup Particulate Respirator

GN650



Ref. Description

GN650 N95 particulate respirator



Foldable N95 Particulate Respirator

GN651



Ref. Description

GN651 Foldable N95 particulate respirator



Foldable N95 Particulate Respirator with Exhalation Valve

GN651V



Ref. Description

GN651V Foldable N95 particulate respirator with exhalation valve



Respiratory Protection

N95 Molded Cup Particulate Respirator

GN652



Ref. Description
GN652 N95 Molder

N95 Molded cup particulate

te



N95 Molded Cup Particulate Respirator with Exhalation Valve

GN652V



Ref. Description

GN652V N95 Molded cup particulate respirator with exhalation valve



N95 Foldable Particualte Respirator

GN656



Ref. Description

GN656 N95 foldable particulate respirator





Head Protection



Cap Style Hard Hat




Vented

Vented











Ratchet System

Full Brim Hard Hat









Ref.	Air Flow	Ref.	Air Flow	Color	Suspension
GH328RVW	Vented	GH328RNW	Non-Vented	○ White	4 Points Ratchet
GH328RVY	Vented	GH328RNY	Non-Vented	Yellow	4 Points Ratchet
GH328RVH	Vented	GH328RNH	Non-Vented	Hi-Vis	4 Points Ratchet
GH328RVR	Vented	GH328RNR	Non-Vented	Red	4 Points Ratchet
GH328RVB	Vented	GH328RNB	Non-Vented	Blue	4 Points Ratchet
CH328DVC	Vented	GH328RNG	Non-Vented	Green	4 Points Datchet



GH328RVW



Retail Displays





Display

POP006 - PDQ





Display

POP003 - Clip Strip



Size: 630mm X 300mm 25" X 12"

Display

12 Displays Boxes Quarter Pallet



Display

POP005 - Safety Eyewear Display



Size: 550mm X 360mm X 170mm 21.6" X14.1" X 6.6"

Display


POP001 - Floor Stand



Size: 480mm X 350mm X 1850mm 19" X 14" X 73"

Display

POP009 - Gondola

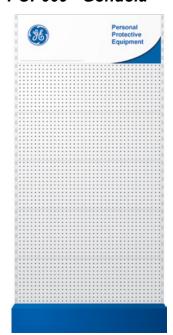



Size: 1000mm X 2164mm X 444mm 39" X 85" X 17"

Display

POP002 - Iron Tube Rack



Size: 1700mm X 480mm X 350mm 67" X 19" X 14"

Display

POP010 - Gondola



Size: 1524mm X 640mm X 584mm $\,$ 60" X 25" X 23" $\,$



Index

PROTEC		HANI PROTEC		HEAD PROTECT	ION	HEARII PROTEC	
GE101	68	GG240	17	GH327	96	GP448	
GE103	64	GG242	17	GH328	96	ERGONO	ΜI
GE104	67	GG244	17			GR540	
GE105	72	GG301	21	RESPIRATO PROTECT		GR540 GR541	
GE106	69	GG303	22	GN650	92	GR542	
GE109	71	GG304	21	GN651	92	GR550	
GE111	73	GG305	22	GN651V	92	GR551	
GE112	80	GG306	21	GN652	93	GR553	
GE201	68	GG320	21	GN652V	93	GROSS	
GE202	66	GG321	23	GN656	93	PROTEC [*] CLOTHI	
GE203	64	GG322	23	Chica		GV076	
GE205	69	GG330	24	HEARIN		GV078	
GE206	70	GG331	24	PROTECT		GV082	
GE208	74	GG400	30	GM450	79	GV084	
GE212	70	GG401	30	GM451	79	GV086	
GE308		GG402	30	GM452	79	GV088	
HAN		GG410	31	GM452HV	80	GV092	
PROTEC		GG411	31	GM453	80	0.002	
GG201	11	GG415	32	GM454	80	PROTEC [*]	
GG205	10	GG416 GG417	32 32	HEARIN	G	COVERA	LI
GG206	10	GG417 GG419	31	PROTECT		GW900	
GG207	10			GP425	81	GW901	
GG208	11	GG421	33	GP426	81	GW902	
GG209	12	GG422	33	GP427	81	GW903	
GG211	12	GG500	37	GP428	81	GW904	
GG215	13	GG501	37	GP429	81	GW905	
GG216	13	GG503	37	GP430	81	GW906	
GG217	13	GG520	38	GP431	81	GW907	
GG221	14	GG530	38	GP435	82		
GG222	14	GG600	42	GP439	82		
GG223	14	GG601	42	GP440	82		
GG224	15	GG602	42	GP444	83		
GG225	15	GG603	42	GP445	82		
GG226	15	GG604	42				
GG230	16	GG605	42				



Contact Us

For any inquiries or questions please do not hesitate to contact us



Email sales@cacoamerica.com





Telephone +1 (305) 512-1150



